LASER TECH™



# QCW Fiber Laser

## YLP-QCW-200/2000-W

YLP-QCW-200/2000-W quasi-continuous fiber lasers with a variety of compatibility and control modes, and flexible and adjustable pulse width waveform, are ideal for long pulse, high energy applications. In precision metal cutting, ceramic cutting, drilling applications more delicate processing, higher precision.

## Advantages

- High brightness, small focus spot size, higher precision
- High peak power, high single pulse energy, suitable for high inverse material cutting and spot welding
- Maximum modulation frequency is 50kHz and the minimum pulse width is 10us

## Applications

It is widely used in 3C material cutting, power battery electrode welding, mobile phone antenna welding, long pulse drilling, ceramic cutting, fine welding and metal/non-metal fine cutting.

The professional performance laser series of GW is aimed at customers who have the pursuit of product performance indicators, the replacement of imported products or the product functionality requirements. Product design to the first-line brand, with better product performance indicators, perfect functions, design redundancy is greater, to provide customers with more value-added space.


- QCW fiber lasers utilize relatively long, high-power laser pulses
- QCW lasers are generally more cost effective and productive in applications requiring low thermal input or high pulse energy
- Its peak power is about 10 times higher than that of the average CW laser

| | | | |
|---|---|---|---|
| 10X peak power | Up to 20J Pulse Energy | Support Remote ON LINE | Extensive interface services |

# QCW Fiber Laser

## YLP-QCW-200/2000-W

| Product specification parameter | YLP-QCW-200/2000-W |
|---|---|
| Central Wavelength (nm) | 1080±10 |
| Operating Mode | Pulse/CW |
| Modulation Frequency (kHz) | 50 |
| Maximum Continuous Mode Power(W) | 200 |
| Maximum Pulse Mode Peak Power(W) | 2000 |
| Maximum Pulse Mode Average Power(W) | 200 |
| Maximum Pulse Energy(J) | 20 |
| Pulse Width(ms) | 0.01～50 |
| Delivery Fiber Core Diameter | ＜1.2@14μm； ＜5@50μm |
| Optical Cable Length(m) | 5@14um； 15@50um |
| Cooling Method | Water-cooling |
| Ambient Temperature Range (℃) | 5-45 |
| Input Voltage | 380VAC/50Hz |
| Dimension (mm) | 482 x 513x 132 (L×W×H) |
| Weight (kg) | ≤45 |

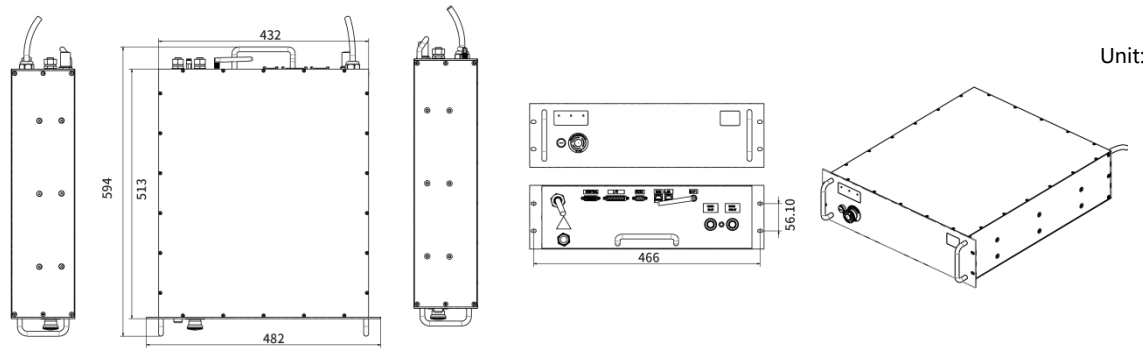


Unit: mm

Legal Notice: All product information is believed to be accurate and subject to change without notice.

Legal statement:

GW smart fiber laser products are designed in strict accordance with safety regulations. All production is in accordance with international standards and regulations currently in force in the country. Each GW laser has a warning sign as shown in the figure.




GW(Shanghai) Laser Technology Co.,Ltd. Tel: +86 2139721122 Email: sales@gwlaser.tech
Web: www.gwlaser.tech Addr: Building 5-1, No.398, Shuanglian Road, Xujing Town, Qingpu District, Shanghai