LASER TECH™



Multi-mode Fiber Laser

YLPM-40000-W

YLPM-40000-W EO conversion efficiency is high, design redundancy, long-term use of low attenuation rate, using multi-module design, can achieve module independent control, is a compact volume, good beam quality, maintenance-free high power fiber laser, with excellent thick plate cutting performance, air cutting faster, higher perforation efficiency.

Advantages

- Each single module,separately control,lower machine halt risk
- ABR technology for various high-reflective material
- Multi-mode design,optimized optical fiber coupling technique,lower fault rate
- More power margin, more stability

Applications

Widely used in laser cutting, laser welding, laser cladding, laser brazing, laser surface heat treatment, etc., the application of hardware, medical, automotive, shipbuilding, aviation, construction machinery and other fields.

The professional performance laser series of GW is aimed at customers who have the pursuit of product performance indicators, the replacement of imported products or the product functionality requirements. Product design to the first-line brand, with better product performance indicators, perfect functions, design redundancy is greater, to provide customers with more value-added space.

- 976nm high efficiency pumping technology, EO efficiency ≥42%
- CHF technology， improve cutting speed and meet cutting consistency requirements
- ABR anti-reflection design, suitable for a variety of high reflective materials processing applications
- The output core diameter can be customized to meet the application requirements of multiple scenarios


EO conversion efficiency≥42%	Easily process high anti materials	Power closed loop control	Custom waveform output

Multi-mode Fiber Laser

YLPM-40000-W

Product specification parameter	YLPM-40000-W
Output Power (watt)	40000
Operating Mode	CW/Pulse/Built-in program
Output Power Range (%)	1-100
Output Laser Wavelength (nm)	1080±10
Beam Quality	$M^2 \leq 22$
Interface Type	Q+
Delivery Fiber Core Diameter (conventional configuration, optional)	100um
Cooling Method	Water-cooling
Ambient Temperature Range (℃)	5-45
Input Voltage	380VAC/50Hz
Dimension (mm)	699 x 1118 x 1415 (L×W×H)
Weight (kg)	550

Unit: mm

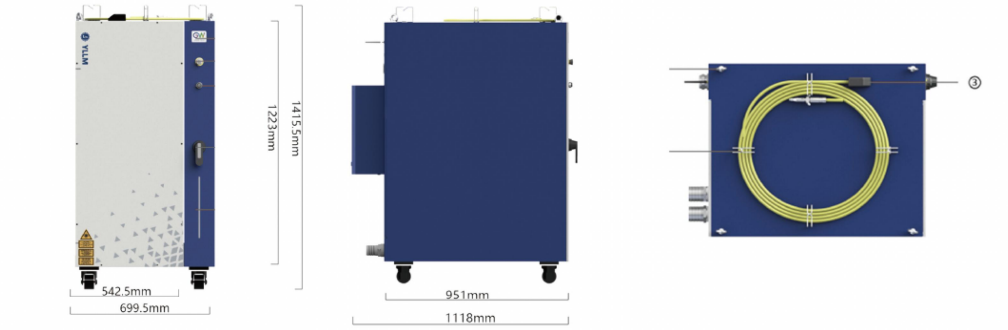

Legal Notice: All product information is believed to be accurate and subject to change without notice.

Legal statement:

GW smart fiber laser products are designed in strict accordance with safety regulations. All production is in accordance with international standards and regulations currently in force in the country. Each GW laser has a warning sign as shown in the figure.



GW(Shanghai) Laser Technology Co.,Ltd. Tel: +86 2139721122 Email: sales@gwlaser.tech
Web: www.gwlaser.tech Addr: Building 5-1, No.398, Shuanglian Road, Xujing Town, Qingpu District, Shanghai